



ExpressCard 34/54 to PCI-E Card

User Manual

Ver. 1.00

All brand names and trademarks are
properties of their Respective owners.


FEATURES:

- Compliant with new PCI Express interface
- Compliant with ne ExpressCard 34/54 interface
- Data transfer rate up to 3 Gbps
- Supports on-line 2.5 Gbps PCI Express specification
- Supports PC (Windows 2000 / XP / Vista)
- Supports Mac (OSX 1.4.7 or Later)

SPECIFICATION:

- Model Name: APIOTEK EXTREME ExpressCard 34/54 to PCI-E Card
- Description: ExpressCard 34/54 to PCI-E Card
- Dimension: 120 mm x 95 mm x 19 mm
- Weight (Card Only): 95 g
- Interface: PCI Express and Express Card
- System Environment
 - Operating Temperature: 20°C ~45°C
 - Operating Humidity: 20% ~80%RH
 - Operation Voltage: +3.3V (+/-5%)
- System Requirements
 - Supports Windows 2000, XP, and Vista
 - Supports Mac OSX 1.4.7 or later
- Additional Parts
 - User Manual x1

HARDWARE DESCRIPTION:

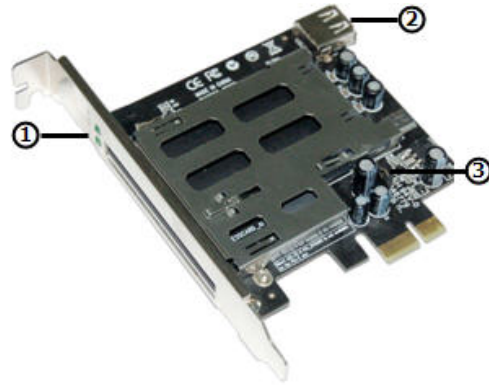

① LED(3.3V/1.5V) ② USB PORT ③ Jumper J1

LED: 1.5V or 3.3V power light indication

Jumper Setting(J1):

1. Short 2-3 (Default)

2. Short 1-2 if PCI-3V3AUX is not available on the PCIe slot

Note: For normal using, please set jumper short 1-2

INSTALLATION:

General instructions for installing the card are provided below. Since the design of system may vary, refer to your system's reference manual for further information, if needed.

- Turn OFF the power to your computer.
- Unplug the power cord and remove your computer's cover.
- Remove the slot bracket from an available PCIe slot.
- Carefully align the card to the select PCIe slot and push the board down firmly, but gently, until it is well seated.
- Replace the slot bracket's holding screw to secure the card.
- Connect the PCIe-to-ExpressCard Adapter's USB port to an available USB port on the computer with the USB A-A Extension Cable.
- Replace the computer cover and reconnect the power cord