



eSATA II Express Card Adapter

User Manual

Ver. 1.00

All brand names and trademarks are
properties of their Respective owners.


FEATURES:

- Compliant with new Express Card 34/54 interface
- eSATA II = eSATA300 (eSATA port x 1)
- Data transfer rate up to 3 Gbps
- Supports on-line 2.5 Gbps PCI Express specification
- Supports DMA & PIO mode
- Supports Native Command Queuing (NCQ)
- Supports Hot-plug capable
- Supports PC (Windows 2000 / XP / Vista)
- Super light weight
 - Easy to carry everywhere

SPECIFICATION:

- Model Name: APIOTEK eSATA II Express Card Adapter
- Description: eSATA II Adapter for Notebook
- Dimension: 34 mm x 112 mm x 8 mm (1.34" X 4.1" X 0.31")
- Weight (Card Only): 27 g
- Chipset: JMicron JMB 360
- Interface: Express Card
- System Environment
 - Operating Temperature: 20°C ~45°C
 - Operating Humidity: 20% ~80%RH
 - Operation Voltage: +3.3V (+/-5%)
- System Requirements
 - Supports Windows 2000, XP, and Vista
- Additional Parts
 - User Manual x1
 - Driver CD x1

HARDWARE DESCRIPTION:

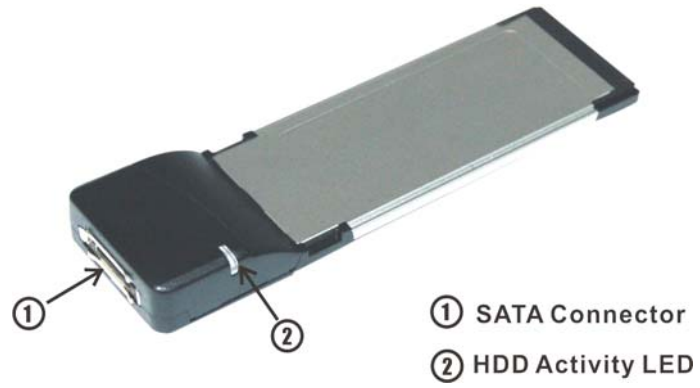

INSTALLATION:

General instructions for installing the card are provided below. Since the design of system may vary, refer to your system's reference manual for further information, if needed.

Insert the Card into the ExpressCard slot of your system. Make sure it is inserted all the way in for a solid connection.

[Important]

Please check with your system's manufacturer for the latest system firmware update before installation.

For Windows XP / 2000 / Server 2003:


- New Installation -

1. At the Found **New Hardware Wizard** window pop-up, please click Cancel button to cancel the driver installation for the device at this moment. The driver for this device will be installed in the next step.
2. Please insert the CD driver bound with eSATA II 300 1-Port ExpressCard into your CD-ROM Drive.
3. At the Windows desktop, click Start, then Run.
4. Type D:\ExpressCard\1-SATA\Setup.exe, then click OK.
(Change D:\ to match your CD-ROM drive letter)
5. Follow the on-screen instructions to complete the installation.
6. Restart Windows to complete the installation.

To Verify Windows® 2000/XP/Server 2003 Installation

Click on the “Device Manager” tab in System Properties, which you access from the Windows Control Panel. You should see an “JMicron JMB36X RAID Controller” installed under “SCSI and RAID controllers” item.

START > Control Panel > System > Device Manager



To Hot-Plugging A Hard Disk Drive

To remove a drive from a powered up system, please follow the steps below:

1. Right click My Computer and click Manage.
2. Select Device Manger.
3. Click Disk Drives, right click the target disk and select Disable/Enable.
4. You can now remove the target disk.